




A-LED-W150 – Continuous Operation and strobed LED light

The AOS LED lights are solid built ultra-bright LED light panels for constant or strobe illumination. The solid design makes the LED lights ideal for use in industrial applications. The AOS LED light is easily mounted on tripods or placed in custom specific locations. The heart and core of these lights are ultra-bright LEDs and state of the art control electronic.


General specifications

Power Input	24V / 160W
LED Power consumption	150W (High performance LED cluster, light output see on revers side)
Opening Angle	50°
Physical Dimension	h:160 x w:135 x d:85
Power Input	LEMO connector, 2 Pin / Mating connector cable side: FGG.1B.302.CLAD72Z
Color temperature	5700°K
Operation "ON"	Continuous operation, flicker free push "On" button
Operation "Remote ON"	Continuous operation, flicker free by switch closing contact via BNC connector
Operation "Strobe"	Strobed operation by applying TTL negative signal to BNC connector
Cooling	Active cooling by fan
Mounting	Tripod mounting: 1 x UNC 1/4", 2 x M6 thread on bottom

Optical specifications

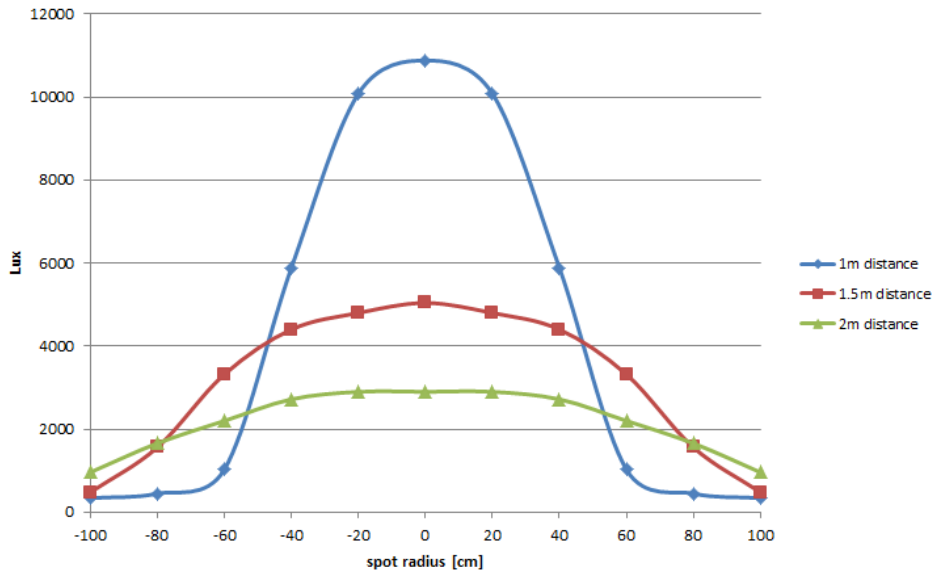

Light Output A-LED-W150 1m / 1.5m / 2m distance

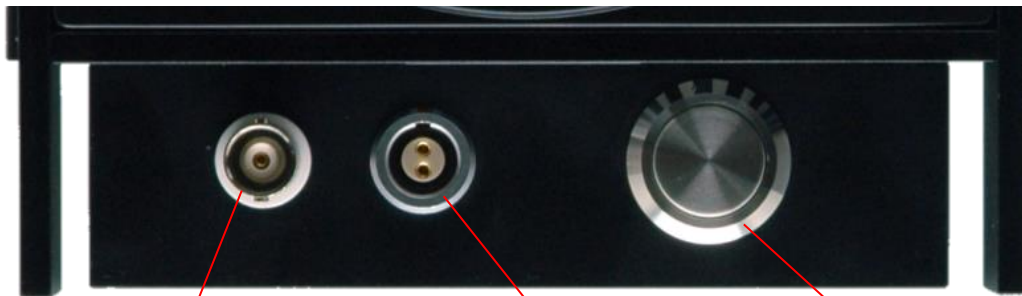

BNC input for
"Remote ON" or
strobed operation

Power Input
24V / 160W

On/Off push button for
constant light (no strobe
function)

Ordering information

03-420-50	A-LED-W150 with 50° opening angle Shipment includes: – AOS-LED 150W Light – <i>no power supply</i>
31U2006	Power Supply 110-230VAC / 24VDC / 160 Watt

Your local AOS partner:

IMAGING DYNAMICS, LLC
734 207-8245
email: idbillb@msn.com
web: www.imaging-dynamics.com

